

Kingtronics®

RKT-3386


Trimming Potentiometers

FEATURES

Single Turn/ Cermet/ Industrial/ Sealed

Many Terminal Styles

PICTURE



Electrical Characteristics

Standard Resistance Range	10Ω - 5MΩ
Resistance Tolerance	±10% ; ±20% for 10 ohm
Absolute Minimum Resistance	≤10Ω (100Ω ≤ R ≤ 1KΩ) ≤1%R (R > 1KΩ)
Contact Resistance Variation	CRV ≤ 3%R or 5Ω (whichever is larger)
Insulation Resistance	R _I ≥ 1GΩ (100Vac)
Withstand Voltage	220VDC
Effective Travel	300° ± 10°


Environmental Characteristics

Power Rating (315volts max)	0.5W@70°C, 0W@125°C
Temperature Range	-55°C ~ +125°C
Temperature Coefficient	±200ppm/°C (±100ppm/°C on request)
Temperature Variation	-55°C, 30min, +125°C 30min, 5 cycles ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 10%
Collision	100m/s ² , 4000cycles, ΔR ≤ 2%R
Electrical Endurance at 70°C	0.5W@70°C, 1000h ΔR ≤ 10%R Δ(Uab/Uac) ≤ 10%, CRV ≤ 3% or 5Ω (whichever is larger)
Rotational Life	200 cycles ΔTR ≤ 10%R, CRV ≤ 3% or 5 Ω (whichever is larger)


Physical Characteristics

Starting Torque	≤ 35mN·m
Marking	Resistance Tolerance (When no identification, it is of ± 10%) Resistance Code, Model
Standard Packaging	50pcs, per tube


Common Dimensions

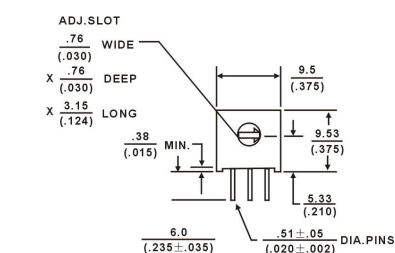


RKT-3386B




RKT-3386C



RKT-3386H



RKT-3386J



Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
150	151
200	201
250	251
300	301
470	471
500	501
680	681
1,000	102
1,500	152
2,000	202
2,200	222
2,500	252
3,000	302
4,700	472
5,000	502
6,800	682
10,000	103
15,000	153
20,000	203
22,000	223
25,000	253
30,000	303
33,000	333
47,000	473
50,000	503
68,000	683
100,000	104
150,000	154
200,000	204
220,000	224
250,000	254
300,000	304
330,000	334
470,000	474
500,000	504
680,000	684
1,000,000	105
2,000,000	205
2,200,000	225
5,000,000	505

Special resistances available.



Kingtronics® International Company

Kingtronics®

RKT-3386


Trimming Potentiometers

How to Order




Tolerance is ± 0.25 if no identification


Common Dimensions Top Adjust

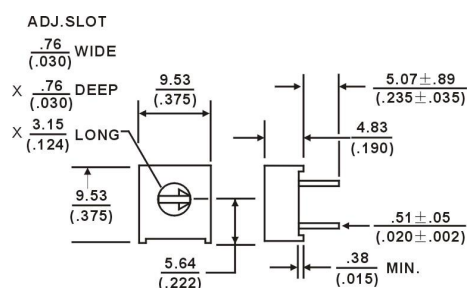


RKT-3386F




RKT-3386S




RKT-3386W




RKT-3386X




RKT -3386T







RKT -3386U





RKT-3386Y



RKT-3386 F,K,P,R,U,Y-EY5 (RESISTANCE CODE)-L



RKT-3386 F,K,P,R,U,Y-EY5 (RESISTANCE CODE)-TL



Kingtronics® International Company

Website: www.kingtronics.com

Email: info@kingtronics.com

Tel: (852) 8106 7033


Fax: (852) 8106 7099

Kingtronics®


RKT-3386

Trimming Potentiometers

RKT -3386K




RKT -3386G

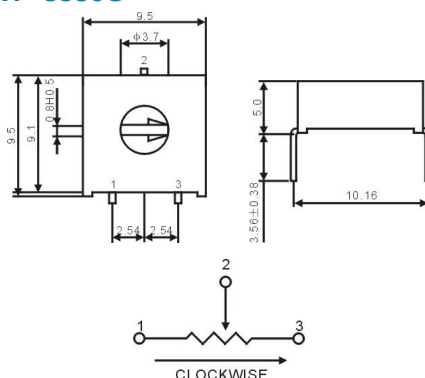


RKT -3386

(STYLE) -EY5-(RESISTANCE CODE)


Side Adjust

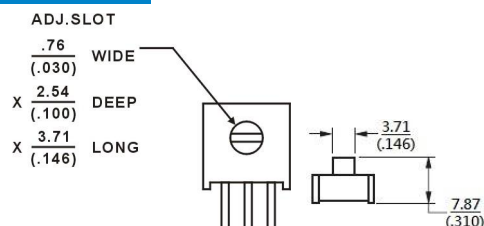


Top Adjust




RKT -3386M




RKT -3386V



RKT -3386P




RKT -3386R



RKT-3386

(STYLE)-EY5-(RESISTANCE CODE)-T

The Model 3386 is available with a knob for finger adjustment. Add suffix letter "T" to order code.

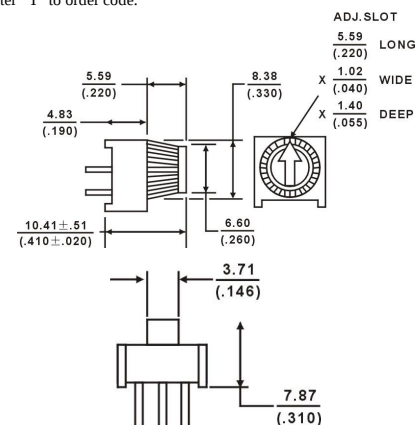

Note: Specifications are subject to change without notice.

Kingtronics® International Company

Website: www.kingtronics.com

Email: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099